



## 44 x 56 Welded Pallets (1120mm x 1420mm)


ORBIS 44 x 56 welded pallets (1120mm x 1420mm) are designed to convey glass bottles, steel cans and other rigid packaging. The one-piece welded and structural foam injection molded construction offers great strength, durability, close tolerance, dimensional consistency and stability. They are available in FDA approved materials for all types of food and beverage applications and withstand temperatures ranging from -4°F to 130°F (-20°C to 55°C). The Welded pallets have recessed areas for UPC bar coding. They are also available with either a 9-post or 12-post style, two different heights for easy handling, and a solid deck for demanding applications.



### Industry Applications:

- Food processing
- Beverage
- Automotive
- Warehousing
- General Industry

# 44 x 56 Welded Pallets (1120mm x 1420mm)

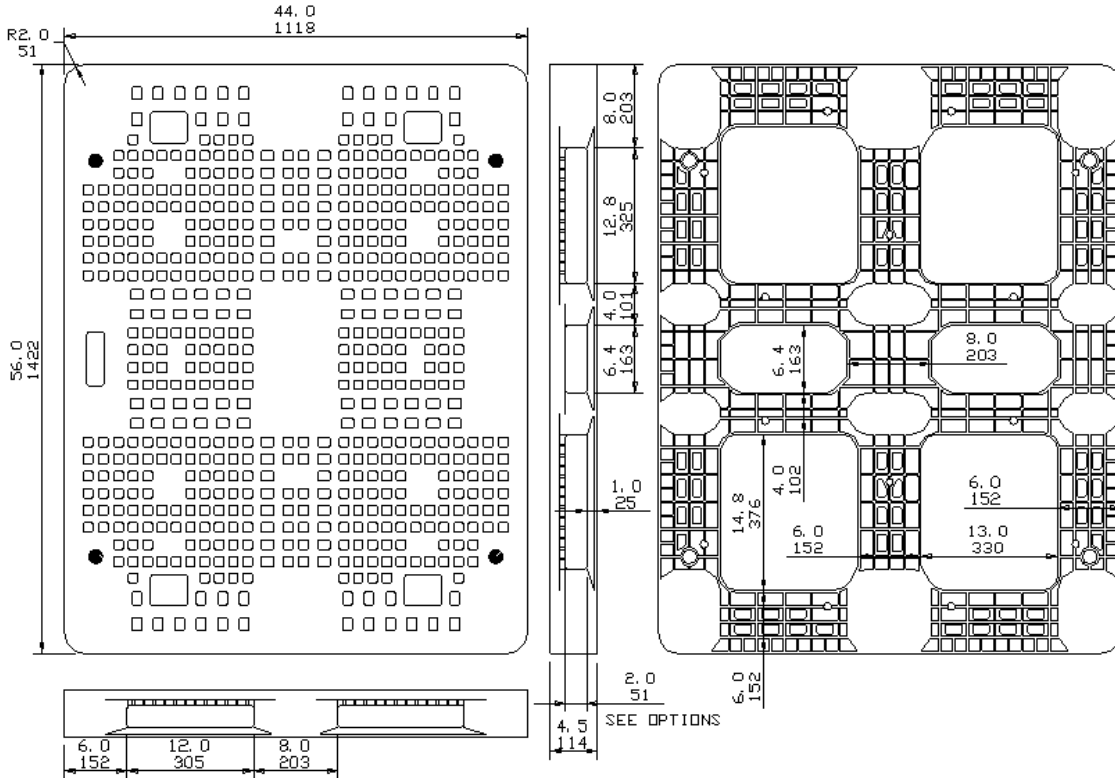

Performance characteristics vary with application.



- Consistent weight for accurate transportation costs
- Environmentally friendly and 100% recyclable
- Smooth, all plastic construction protects product (no nails, rust or splinters)
- Reduces packaging waste by eliminating wood pallet disposal
- Improves workplace safety with smooth design and stable stackability
- Rapid economic payback
- Resistant to common chemicals, insects and water

Model	Dimensions (in/mm)			Weight (lb/kg)	Load Capacity (lb/kg)		Truckload Quantity	
	L	W	H		Static	Dynamic	48' Trailer	53' Trailer
44 x 56 Welded, 9-post	44.0	56.0	5.125	54.0	33,000	3,800	500	575
	1120	1420	130	24.5	15,000	1,700		
44 x 56 Welded, 12-post	44.0	56.0	4.5	52.0	33,000	3,800	500	575
	1120	1420	114	23.5	15,000	1,700		

\* Contact your sales representative for 48' TL quantity. Available in truckload and above quantities only.

## Design:

Made in high-density polyethylene (HDPE) material

Structural foam injection molded for strength, durability, close tolerance, dimensional consistency and stability

Welded one-piece construction

Tapered 4-way entry for easy targeting

Fork tine openings:

Beveled deck and base tapering to:

- Glass-Pal 2.6"/67mm
- Universal-Pal 2.0"/51mm

Tolerances:

+/- 0.25" or 6.35mm

Flatness:

.2" or 5mm

## Options:

Molded-in logo

Hot stamp

Grommets

Bar coding

Custom colors

Push-A-Block™ on short sides

Strap recess

Solid deck

Polypropylene (PP) material

9 or 12 posts

Hand-Held Containers Bulk Containers Pallets Custom Interior Dunnage World-Class Services



ORBIS Corporation

1055 Corporate Center Drive Oconomowoc, WI 53066 USA

Phone: 262-560-5000 ■ Fax: 262-560-5841 ■ Toll Free: 800-999-8683

www.orbiscorporation.com



ORBIS® Corporation is a subsidiary of Menasha Corporation.

44x56Welded/1202 0-5013